

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11)

EP 0 932 304 A2

(12)

## EUROPEAN PATENT APPLICATION

(43) Date of publication:  
28.07.1999 Bulletin 1999/30

(51) Int Cl.<sup>6</sup>: H04N 5/232

(21) Application number: 99300421.7

(22) Date of filing: 21.01.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 23.01.1998 FI 980150

(71) Applicant: NOKIA MOBILE PHONES LTD.  
02150 Espoo (FI)

(72) Inventors  
• Knuutila, Jarno  
33720 Tampere (FI)  
• Toivanen, Jari  
33720 Tampere (FI)

• Juhola, Janne  
33720 Tampere (FI)  
• Lipponen, Markku  
33720 Tampere (FI)  
• Aho, Ari  
33720 Tampere (FI)  
• Haavisto, Janne  
33720 Tampere (FI)  
• Saarinen, Kaj  
33720 Tampere (FI)

(74) Representative: Jeffery, Kendra Louise et al  
Nokia IPR Department  
Nokia (UK) Limited  
Summit Avenue  
Southwood  
Farnborough Hampshire GU14 0NZ (GB)

### (54) Method for transferring image information

(57) The invention relates to a method for transferring image information from a camera module (1) to an electronic device, such as a mobile station (23). In the camera module (1), an image is formed by an image sensor (2) comprising pixels, where the light to which the pixel ( $P_{1,1}$ — $P_{m,n}$ ) is exposed is converted into an analog signal which is converted into digital image information. The image information is transferred in serial form, and the transfer of the image information is controlled by the electronic device (23).

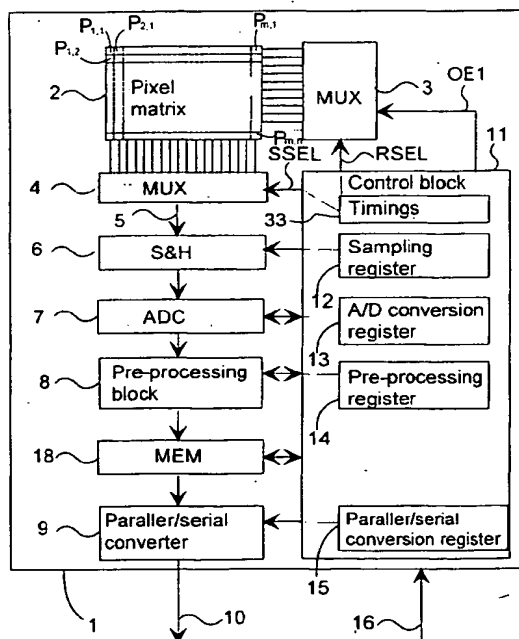


Fig. 1a

## Description

[0001] The present invention relates to a method for transferring image information, a camera module, and a mobile station.

[0002] In digital cameras and video cameras, an optical image is converted into electrical form by an image sensor, typically a charge coupled device (CCD). Such an image sensor consists of several photosensitive picture elements (pixels) which are arranged advantageously in a matrix form. The number of pixels in the image sensor affects the resolution of the image to be formed. Typically, the image sensor used in cameras and video cameras consists of hundreds of thousands of pixels, for example  $640 \times 480 = 307\,200$  pixels. In a CCD sensor, light induces a charge in the pixel, which is affected e.g. by the intensity of the light as well as the time of action of light in the pixel, i.e. exposure time. Cameras are equipped with optics whereby the image is focused at the pixels of the image sensor. When a CCD sensor is used, the pixels are uncharged before taking the picture, whereby after a predetermined exposure time, each pixel has a charge which is proportional to the quantity of light directed to it and which can be measured. After the exposure, the entry of light in the CCD sensor is prevented e.g. with a mechanical shutter. The shutter function can be implemented also electrically by sufficiently quick reading of the image sensor.

[0003] In the CCD sensor, the pixels are chained by coupling them in series, and the output of the CCD sensor is coupled with the first pixel in the connection in series, whereby the image signal from the CCD sensor can be read by transferring charges from one pixel to the next, timed by a charge transfer signal. The charges can be read from the output of the CCD element, whereby the charge of the pixel coupled to the output is read first. In the same connection, the charge transfer signal induces the transfer of charges in other pixels to the next pixel, i.e. the pixel coupled to the output will receive the charge of the second pixel coupled to the same, the second pixel will receive the charge of the pixel that is third in the connection in series, respectively, etc. Each line of the image sensor can form a separate pixel chain. Each pixel chain is provided with a separate output from the first pixel in the chain, as presented above. From these outputs from the pixel chains, the charges can be transferred e.g. to a transfer register. Reading a CCD image sensor formed in this way requires transfers of charges in a way corresponding to the number of pixels in the pixel chain. Thus, measuring the charge of a single pixel is not possible except by carrying out the transfer of charges as presented above as long as the charge of the desired pixel is in the output of the image sensor. Using such an image sensor, undersampling of the image is difficult and slow because, in practice, the charges of all pixels in the pixel chain must be transferred to the output even though some of the pixels were not processed in undersampling.

[0004] The conversion of an analog signal generated by the image sensor to digital form can be conducted with an analog/digital converter. The conversion accuracy of the analog/digital conversion is typically 8 bits, whereby 256 luminous intensity levels are obtained from each pixel. Considering the capacity of human eye, this number is usually sufficient to provide the required image quality. From the analog/digital converter, this conversion result is transferred in parallel form for further processing steps, such as for storing in an image memory or on a video tape. In digital cameras and video cameras of prior art, the display device used is an analog display device, such as a LCD display device equipped with an analog connection, whereby the image is transferred as an analog signal to the display device.

[0005] In addition to the above-mentioned CCD sensors, recent development has involved so-called CMOS image sensors, whereby it is also possible to conduct the photoelectric conversion of the image. These CMOS image sensors are based on primarily two different operating principles: integrating and non-integrating image sensors.

[0006] In integrating image sensors, the current generated by the pixel is used to charge a capacitor arranged in connection with the pixel. The charge of the capacitor depends on the strength and charge time of the current induced by the pixel. Before image formation, each capacitor is uncharged, after which the current generated by the pixel starts to charge the capacitor, whereby the charge accumulated in the capacitor after the exposure is proportional to the quantity of light to which the pixel was exposed. Setting the exposure time of integrating CMOS image sensors can be handled e.g. by a mechanical shutter, whereby the control electronics can be made simpler whereby the exposure time of each image element is substantially the same, or by timing the discharging of the capacitor and measuring of the accumulated charge substantially the same for different pixels. In an integrating image sensor, a charge is also accumulated in the capacitor when the pixel is in darkness. This may distort the image signal from the pixel. To correct this, a so-called correlated double sampling (CDS) method has been developed, whereby the charge of the capacitor of the pixel is measured after charge resetting preferably before exposure, and this value is stored for each pixel. The charge of the capacitor is measured again after the exposure time, and the stored value is subtracted from this measurement value. The difference corresponds better to the real image signal proportional to the quantity of light than an image signal obtained by one measurement. After the charge measurements presented above, the measurement value is subjected to analog/digital conversion, whereby the measurement result can be stored in digital form.

[0007] In non-integrating CMOS image sensors, the current generated by each pixel is measured, which is proportional to the intensity of light to which the pixel is

exposed at the time. This kind of a sensor has the advantage that each pixel can be designated separately and the current can be measured irrespective of other pixels and exposure times. This random access is easier in integrating image sensors, if a mechanical shutter is used to set the same exposure time for different pixels.

**[0008]** CMOS image sensors can be also divided into passive and active image sensors. Their primary difference lies in the fact that in active image sensors, the pixel is also provided with an intensifier. This reduces the spreading of the charge of capacitors in the integrating image sensor to the next capacitors at the stage of measuring the charge, which may distort the measuring results in passive image sensors.

**[0009]** Irrespective of the type of the image sensor, the digitised values of the pixels are transferred for further processing typically in analog form, pixel by pixel. Thus, the image field is scanned for example line by line, starting from the first pixel on the first line. The analog image signal can be sent to be displayed e.g. by an analog display device. At the stage of further processing, the analog image signal can be converted to digital form e.g. for storage in an image memory, whereby the digital value formed from the analog signal of each pixel is stored in a memory location corresponding to the pixel in question. The image signal can be subjected to e.g. filtering and noise suppression, if necessary.

**[0010]** In currently known camera modules comprising an image sensor and control logic, the image information can be read either in analog form, whereby the signal must be subjected to analog/digital conversion for further processing steps, or readily converted in parallel digital form. Further, the synchronisation of image information is conducted by the control logic of the camera module in a predetermined image format, whereby typically a standard quantity of information must be transferred from each image. The quantity of information for one image depends on the number of pixels in the image sensor, i.e. the resolution, and the accuracy of the analog/digital conversion of each pixel. For example, in an image sensor consisting of 480 horizontal lines and 640 vertical lines, thereby comprising 307 200 pixels, each of which is subjected to analog/digital conversion of 8 bits, the total information of one image amounts to 2 457 600 bits.

**[0011]** When such a camera module of prior art is connected to a portable electronic device, such as a mobile station, one problem is the greater space needed by the parallel bus solution, compared with using a serial bus for the transfer of image information. In a typical application, information of 8 bits per pixel is used in a black-and-white image and information of 24 bits per pixel in a colour image, whereby at least 3 parallel transfer lines are needed. When a separate camera module is used, the coupling cable to be connected with the parallel bus should comprise conductors for each line of the parallel bus and also a ground conductor and possibly a power

supply conductor for the camera module, whereby the coupling conductor becomes considerably more expensive and stiffer to use than a coupling cable of a serial bus containing fewer conductors. Furthermore, possible capacitive coupling between signal transfer lines in the parallel bus may cause cross-talk between adjacent conductors. Cross-talk is easily increased when the length of the conductors is increased. Furthermore, parallel data transmission complicates the structure of the device to be connected to the camera module and increases the manufacturing costs.

**[0012]** The use of a serial bus in solutions of prior art would typically require increasing the data transfer rate at least 8 times compared with data transfer in parallel form, if the aim is to transfer the same quantity of information in the same time. This is not always possible, because fast digital signals have very sharp edges, i.e. the rise and fall times of the signal are very short, whereby they easily induce disturbances in the operation of the electronic device as well as other electronic devices. Also, signals containing rapid changes are susceptible to distortions which may affect the reliability of the data transfer.

**[0013]** One disadvantage with present camera modules is their inflexibility; they produce an image in a determined form at a rate determined by the camera module itself. Information produced by camera modules of prior art cannot be easily affected, whereby it may be necessary to conduct unnecessary functions in the device receiving the image signal particularly when the quantity of image information entering the receiving device exceeds the quantity that can be utilised in the receiving device, whereby transferring the unutilised image information consumes power to an unnecessary degree. Some camera modules of this kind provide the option of adjusting how often a new image is transferred from the camera module. However, the quantity of information in each image is not changed. If the receiving device cannot process all images at the set updating rate but controls the camera module to transfer images at a slower rate, the updating rate may sink to such a low level that it can be detected in the image e.g. as discontinuous movement.

**[0014]** In several digital cameras, an LCD display device is presently used for displaying image information. This display device is used both as a viewfinder for directing the camera to the desired photographic subject and for observing the picture taken, whereby the picture can be taken again, if necessary. Display devices of this kind are typically analog, whereby the image signal is in analog form. When used as a viewfinder, the image displayed with a display device must be updated at a sufficient rate. The frequency of updating the image is limited by the large quantity of image information to be transferred and the limited transfer rate. This results in discontinuous movement of the image to be displayed on the display device, particularly during movement of the camera or the photographic subject. Also in several

video cameras, an analog LCD display device is currently used as a viewfinder, whereby the problems are similar during video recording.

[0015] It is an aim of the present invention to provide an improved method for transferring image information e.g. to an electronic device, and a camera module from which image information can be transferred in serial form from an electronic device which may also control the transfer of the image. In addition, the image format can be modified according to the need.

[0016] According to a first aspect of the present invention, there is provided a method for transferring image information from a camera module to an electronic device, such as a mobile station, in which camera module an image is formed by an image sensor comprising pixels where the light to which the pixels are exposed is converted into an analog signal which is converted into digital image information, characterised in that the image information is transferred in serial form and that the transfer of the image information is controlled from the electronic device.

[0017] According to a second aspect of the present invention, there is provided a camera module comprising an image sensor with pixels for conducting photoelectric conversion, and means for conversion of the analog signal generated by said pixels into digital form, characterised in that the camera module further comprises means for transferring digital image information to an electronic device, such as a mobile station, in serial form, and means for conducting the transfer of the image information under control by the electronic device.

[0018] According to a third aspect of the present invention, there is provided a mobile station, characterised in that it comprises: means for connecting a camera module, the camera module comprising an image sensor with pixels for conducting a photoelectric conversion, and means for converting the analog signal generated by the photoelectric conversion means to digital form, and means for controlling the transfer of image information formed by the camera module, and means for transferring the image information formed by the camera module to the mobile station in serial form.

[0019] The invention is based on the idea that image information is transferred in serial form to an electronic device at a rate determined by the same. Furthermore, the quantity of image information to be transferred can be adjusted, whereby e.g. in viewfinder mode it is possible to display images with less image information at a sufficient rate so that disturbing jerky movement is not shown in the image to be displayed on a display device. When taking the final picture, the quantity of image information is raised to a desired level.

[0020] The present invention gives significant advantages compared with prior art. In a camera implemented by the method of the invention, the viewfinder mode and video recording can be implemented so that the image follows the movements of the camera or the imaging object. In simple photography, the final photograph can be,

nevertheless, taken with a resolution which is as high as that possible in cameras of prior art. In video recording, a sufficient image quality is obtained in normal situations. Using the camera module of the present invention, the size and power consumption of the electronic device can be made smaller than when using camera modules of prior art. Moreover, the solutions for transferring image information according to the invention do not require increasing the signal transfer rate, whereby the number of disturbances can be kept significantly smaller than is possible when using solutions of prior art, the image transfer rate being the same.

[0021] Furthermore, the present invention gives the advantage that the data transfer bus between the camera module and the electronic device can be made simpler and the connection means for connecting the camera module can be made simpler in the electronic device.

[0022] In the following, the invention will be described in more detail with reference to the appended drawings, in which

Fig. 1a shows functional blocks of a camera module according to a preferred embodiment of the invention,

Fig. 1b shows the camera module according to a preferred embodiment of the invention in a reduced block chart,

Fig. 2a shows the connection of the camera module according to a preferred embodiment of the invention as a separate device to a mobile station, and

Fig. 2b shows the integration of the camera module according to a preferred embodiment of the invention in a mobile station.

[0023] Figure 1a shows functional blocks of a camera module according to a preferred embodiment in a reduced manner. For the photoelectric conversion of the image, the camera module 1 has an image sensor 2 which in this example is a non-integrating CMOS image sensor, but the invention can also be applied in other types of image sensor, such as integrating CMOS image sensors and CCD image sensors. The resolution of the image sensor 2 is for example 640 x 480, but the resolution as such has no significance in applying this invention. For clarity, not all pixels are shown in the drawings but as examples the first pixel P<sub>1,1</sub>, the second pixel P<sub>2,1</sub> and last pixel P<sub>m,1</sub> of the first line, the first pixel P<sub>1,2</sub> of the second line, and the last pixel P<sub>m,n</sub> of the last line are illustrated. A line selector 3 is used to select the pixel line to be examined at a time, and a column selector 4 is used to select the desired pixel P<sub>1,1</sub>—P<sub>m,n</sub> of the line selected by the line selector 3, the current generated by the pixel being conducted to

the output 5 of the column selector 4. Thus, the output 5 of the column selector contains the current generated by the selected pixel P<sub>1,1</sub>—P<sub>m,n</sub> which is proportional to the intensity of light to which said pixel P<sub>1,1</sub>—P<sub>m,n</sub> is exposed at the moment of reading. When using an integrating image sensor or a CCD image sensor, the charge is proportional to the intensity of the light to which the pixel P<sub>1,1</sub>—P<sub>m,n</sub> is exposed and to the exposure time, whereby a means is also required to discharge each pixel P<sub>1,1</sub>—P<sub>m,n</sub>. As mentioned earlier in this description, it is not easy to implement addressing of single pixels P<sub>1,1</sub>—P<sub>m,n</sub> in CCD image sensors and integrating CMOS image sensors, but in other respects, the operation of the camera module 1 according to the invention is essentially similar to that when using a non-integrating image sensor 2.

[0024] The output 5 of the column selector is coupled to a sample and hold circuit 6. The output voltage of the sample and hold circuit 6 is set at the moment of sampling substantially the same as the input voltage of the sample and hold circuit 6. This output voltage is kept substantially constant until the next sampling instant or during the holding time of the sample and hold circuit 6. With this sample and hold circuit 6, it is possible to keep the measuring voltage supplied to the analog/digital converter 7 for the time required for analog/digital conversion, whereby the analog/digital conversion is as reliable as possible. If necessary, the digital conversion result of the analog/digital converter 7 is sent to a pre-processing block 8 where the image information can be subjected to some conversion and/or filtering operations, such as conversion of colour image format, conversion of image information for different display devices, and image undersampling.

[0025] If the image sensor 2 is intended for taking colour images, each pixel P<sub>1,1</sub>—P<sub>m,n</sub> can consist of three partial elements for different colour components. Typically, a so-called RGB image format (red, green, blue) is used, whereby each colour component can be subjected to a separate photoelectric conversion. This can take place for example by arranging a red filter in front of the pixel measuring the red colour component, preventing the pixel from being exposed to light at substantially other than red wavelengths; in a corresponding manner, a green filter is arranged in front of the pixel measuring the green colour component, and a blue filter is arranged in front of the pixel measuring the blue colour component. In the final image, one dot consists of these three pixels. These pixels corresponding to different colour components can be placed side by side for example on the same line or in the form of an isosceles triangle. Thus, for determining one dot, it is necessary to examine the signal formed by three pixels. This can be done e.g. so that the analog/digital conversion is conducted in the camera module 1 for each colour component one after the other using the same sample and hold circuit 6 and analog/digital converter 7. In another alternative, separate sample and hold circuits and analog/digital convert-

ers are arranged for each colour component. Thus, each colour component is further provided with a selector, preferably a column selector 4.

[0026] Furthermore, colour image sensors have been developed in which the number of pixels is the same as in a monochrome image sensor. This is achieved e.g. in a way that every other pixel is a pixel measuring green light, every fourth one is a pixel measuring red light and every fourth one a pixel measuring blue light. This is based on the capacity of the human eye; the sensitivity to different colours is different. Information given by the green pixel can be used as luminance information almost directly. In the final image signal, for example a group of four pixels is used to form the image signal of one dot. These methods are disclosed in more detail e.g. in patents US-4,642,678 and US-4,630,307.

[0027] The conversion of colour format e.g. from the RGB colour format to a so-called YCbCr format can be conducted by calculation as follows:

$$(1a) \quad Y = 0.299 R + 0.587 G + 0.114 B$$

$$(1b) \quad Cb = -0.168 R - 0.331 G + 0.5 B$$

$$(1c) \quad Cr = 0.5 R - 0.4187 G - 0.0813 B$$

[0028] The luminance component Y indicates the grey tones of the image, and this can be used e.g. in displaying a black-and-white image and in displaying a colour image as a black-and-white image. There are two chrominance components, Cb and Cr, which contain the colour information of the image.

[0029] From the pre-processing block 8, the image information is transferred to the memory 18 of the camera module. From the memory 18, the image information can be transferred to a parallel/series converter 9 where the digitised image information of each pixel P<sub>1,1</sub>—P<sub>m,n</sub> is converted to serial form. The image information can thus be read in serial form from a serial connection bus 10. As the data transfer format in this serial bus, it is possible to use serial data transfer formats known as such, for example in a way that the image information of 8 bits is framed with initial and terminal bits. The transfer of the image information is advantageously controlled by the electronic device, as will be disclosed below in this description.

[0030] For controlling the above-mentioned functional blocks, the camera module 1 is further provided with a control block 11, which in this preferred embodiment includes four control registers 12 to 15 and a timing block 33. A sample register 12 determines at which moment the sample and hold circuit 6 takes a sample from the output 5 of the column selector. A quality register 13 determines the accuracy of the conversion to be conducted by the analog/digital conversion. A pre-processing

register 14 determines whether an image format conversion is to be conducted in the pre-processing block 8 and also whether image information in digital form is to be undersampled. The parallel/serial converter 9 is further provided with a parallel/serial conversion register 15 which controls data transfer on the serial bus 10. The control block also takes care of the operations needed for taking a picture, such as resetting the charges of the pixels  $P_{1,1}$ — $P_{m,n}$  and timing the measurement of the charges of the pixels  $P_{1,1}$ — $P_{m,n}$ .

**[0031]** A control serial bus 16 is connected to the control block 11 of the camera module *e.g.* for transferring control commands and parameters to the control block 11. The control block 11 comprises further means (not shown) for controlling the line selector 3 and the column selector 4.

**[0032]** Figure 1b shows a camera module 1 according to an advantageous embodiment of the invention in a reduced block chart. In the camera module 1 of Fig. 1b, *e.g.* the pre-processing block 8, the parallel/serial converter 9 and the control block 11 of Fig. 1a are implemented in the digital signal processing unit 17 (DSP). In Fig. 1b, the image sensor 2 and the line selector 3 and column selector 4 are shown in one block 2'. In a corresponding manner, the sample and hold circuit 6 and the analog/digital converter 7 are shown in one block 7'. The signal processing unit 17 is provided with a memory 18, preferably at least a random access memory RAM, *e.g.* for temporary data storage. Furthermore, the memory 18 contains the control commands or the like required for controlling the operation of the digital signal processing unit 17. The memory 18 is coupled via a memory connection block 19 to the system bus 20 of the digital signal processing unit. The system bus 20 includes a data bus, an address bus and a control bus, but these are not shown separately, and the practical implementation of these buses is prior art to someone skilled in the art.

**[0033]** The digital signal processing unit 17 further comprises a serial connection circuit 21. It includes a parallel/serial conversion block for the information to be transmitted to the serial bus 10, as well as for converting serial form control information from the control serial bus 16 into parallel form for transmission to the system bus 20.

**[0034]** The signal processing and control block 22 of the digital signal processing unit 17 controls the image sensor 2' for reading the image information of the pixels  $P_{1,1}$ — $P_{m,n}$ . This is conducted advantageously so that in the selection lines of the line selector, which are shown as one line and indicated by the reference RSEL in Fig. 1a, the binary value is set to correspond to the desired line of the image; to select the first line, the value 0; to select the second line, the value 1, *etc.* Furthermore, an output enabling line OE1 is conducted to the line selector, to change the state of the line selection line corresponding to the binary value set in the selection lines to another logical state, *e.g.* logical 0 state. Thus,

the logical 1 state corresponds to a situation where the line is not selected. In the logical 0 state, the first connection interface (conductor) of the pixels coupled to said line is set close to 0 V. In a corresponding manner, in the selection lines SSEL of the column selector, the binary value is set to correspond to the column to be examined. As a result, the input line of the column selector, connected to the corresponding column lines of the image sensor, is coupled to the output line 5 of the column selector, whereby the signal of this line 5 corresponds to the signal of the selected pixel, which can be converted into digital form.

**[0035]** Figure 2a shows the connection of a camera module 1 according to a preferred embodiment of the invention as a separate module to an electronic device, preferably a mobile station 23, by means of an external connection bus 24. The external connection bus 24 comprises a serial bus 10 and a control serial bus 16, whereby control information can be transferred from the mobile station 23 to the camera module 1 and image information can be transmitted from the camera module 1 to the mobile station 23, respectively. The mobile station 23 is provided *e.g.* with a control unit 25 comprising advantageously a microprocessor CPU or a corresponding processor, a memory 26 and a serial connection block 31 (serial input/output) for coupling the external connection bus 24 to the mobile station 23. For example the serial/parallel conversions between the external serial bus 24 and the system bus 24 of the mobile station take place in the serial connection block 31. The memory 26 can be used *e.g.* for storing image information read from the camera module 1, whereby the image can be displayed for example with a display device 27. One advantage of this separate camera module 1 is that the same camera module 1 can be used in connection with different electronic devices equipped with the required connection means for connecting the external connection bus 24 with the electronic device. The external connection bus 24 can consist of conductors, or it can be implemented *e.g.* with infrared data transmission means.

**[0036]** Figure 2b shows a solution in which the camera module 1 according to the invention is integrated in the mobile station 23. Thus, an internal serial connection bus 28 is arranged between the camera module 1 and the control block 25 of the mobile station, to transfer control and image information between the camera module 1 and the control block 25 of the mobile station. The internal serial bus 28 is coupled to the serial connection block 31 of the mobile station which performs *e.g.* the serial/parallel conversions between the serial bus 28 and the system bus 32 of the mobile station. Using this integrated solution, it is possible to achieve a relatively compact mobile station 23 also equipped with the camera function. This has the advantage that no separate external connection bus is needed between the camera module 1 and the control block 25 of the mobile station, and that the use of such an integrated device is in many

situations easier than the use of two separate devices.

[0037] In the following, the operation of the method according to the invention will be described. It is assumed that the camera module 1 is intended for taking single photographs, corresponding to a normal digital photographic camera, and that the image sensor 2 is a non-integrating CMOS image sensor. When preparing for taking a picture, the camera module 1 is set to viewfinder mode, whereby image information of the camera module 1 is displayed on the display device 27, so that the user can direct the camera module 1 to the desired photographic subject and perform cut-out operations, if necessary. The optics of the camera module 1 can, in a manner known as such, comprise various objectives, exchangeable objectives and zoom objectives, but these will not be discussed in more detail in this context. The user sets the camera module 1 to viewfinder mode preferably by using the keypad 29 of the mobile station 23. The control block 25 of the mobile station interprets the button pressing and starts to set the function mode of the camera module 1. To set the function mode, the control block 25 of the mobile station sends the required control commands and parameters to the control block 11 of the camera module 1. These control commands contain the setting of registers according to predetermined parameters. For example, a command for taking a picture is set in the sampling register 12. In the quality register 13, the conversion accuracy is set for the analog/digital conversion of each sample, which may vary preferably from 1 to 8 bits in practical applications. In some cases, it may also be necessary to use a greater conversion accuracy. In viewfinder mode, the conversion accuracy is set smaller than in the actual photography mode, for example 4 bits instead of 8 bits. As a result, the analog/digital conversion converts the sample at an accuracy of four most significant bits (MSB), whereby the conversion is also faster than when using a greater conversion accuracy. In a converter based on sequential approximation, reduction of the conversion accuracy to a half means doubling of the conversion rate. With four bits, it is possible to present 16 different values, but this is a sufficient accuracy in viewfinder mode. Furthermore, an increase in the conversion rate means that in the same time it is possible to transfer the image information of several pixels  $P_{1,1} \dots P_{m,n}$ , whereby, as a result, the image can be updated more often on the display device 27.

[0038] Moreover, if desired, it is possible in the pre-processing register 14 to set information on whether the image information is to be subjected to a conversion, e.g. conversion of colour format. Furthermore, it is possible in the pre-processing register 14 to set information on undersampling, which means, for instance, that not all results of analog/digital conversion are transferred further but for example every second one, or only the value of every other pixel is converted, which will also increase the updating rate of image information. Undersampling reduces the resolution of the image, but, it is possible, if nec-

essary, in the receiving device to form an image corresponding to the original resolution from the undersampled image, e.g. by interpolation on the basis of the received image information.

5 [0039] Furthermore, information is transferred from the control block 25 of the mobile station to the control block 11 of the camera module about the moment for taking the picture. This command can be transmitted by the mobile station 23 for example after the previous image has been processed. This applies particularly to non-integrating image sensors. The command for taking the picture can also be transmitted in advance, if taking the picture requires a longer exposure time, e.g. when an integrating sensor is used. Thus, after the transmission of the command for taking the picture, the mobile station 23 has sufficient time for processing the image under processing, before the camera module 1 takes a new picture, and unnecessary waiting for processing of the image can be avoided.

10 [0040] After the camera module has received the command for taking a picture, the control block 11 interprets the command and starts taking the picture. The control block 11 generates control signals for the line selector 3 and the column selector 4 to select the pixels  $P_{1,1} \dots P_{m,n}$  preferably in a way that one image is read as quickly as possible to eliminate e.g. movement distortions in the image. The pixels are read for example in the following way. After receiving the necessary control commands and parameters, the control block 11 of the camera module sets preferably the first pixel line of the image sensor 2 for reading, with the line selector 3. Next, with the column selector 4, the control block 11 selects the first column, whereby the current of this pixel is present at the output 5 of the column selector and is transferred to the sample and hold circuit 6. It may take a certain setting time to make the current value constant in the output 5 of the column selector before the control block 11 commands the sample and hold circuit 6 to sample this current. The setting time is advantageously some tens of nanoseconds. After the sample and hold circuit 6 has taken the sample, the control block 11 commands the analog/digital converter to start an analog/digital conversion at a precision determined in the quality register 13. The analog/digital converter 7 typically comprises a status line or the like, by means of which the control block 11 can monitor the completion of the analog/digital conversion. After completion of the analog/digital conversion, the control block 11 transfers the conversion result to the pre-processing block 8 and performs pre-processing, if necessary. After this, the image information of the pixel is stored in the memory 18 of the camera module 1, in a memory space allotted to the selected pixel. Next, the control block 11 sets in the column selector 4 information whereby the column selector 4 selects the current of the next pixel into the output 5. This current value is subjected to the same operations as presented above. After conversion of the pixels in the whole line, the control block 11 selects the next line to

be converted, with the line selector 3. After the whole image field has been scanned, the image information is stored in the memory 18 and ready to be transferred. This transfer can be implemented e.g. in a way that the camera module 1 transmits information about the completion of the conversion result of the image to the serial bus 10, whereby the control block 25 of the mobile station transmits a command to start image transfer to the control serial bus 16, if the mobile station 23 is ready to receive the image information. After this, the control block 11 transfers the conversion result of the first pixel from the memory 18 to the parallel/serial converter 9, where the conversion result is converted into serial form and transferred to the serial bus 10. If necessary, it is also possible at this stage to reduce the quantity of information to be transmitted by leaving some of the less significant bits untransferred. The control block 25 of the mobile station receives this information and conducts serial/parallel conversion on the same, and transfers the information to the memory 26 of the mobile station, to a memory location reserved for the selected pixel. Next, the information on the second pixel is transferred, and so forth, until the whole image has been transferred.

**[0041]** Next, the control block 25 of the mobile station for example displays the image on a display device 27 by transferring the image information from the memory 26 to the display device 27, where the image information is displayed at a location reserved for it. If the display device 27 is an analog display device, the image information is further subjected to digital/analog conversion before transferring to the display device 27.

**[0042]** When necessary, it is possible to crop a smaller area (window) from the image to be transferred to the mobile station 23. This is conducted preferably by sending the co-ordinates of two opposite edge points (line and column identifications) of the area to be transferred, together with information on the desired conversion accuracy and resolution of the image. Also in this situation, the camera module takes preferably a full picture and stores it in the memory, but only the image information on the desired area is transmitted to the serial bus 10.

**[0043]** Furthermore, the invention can be applied in a way that the camera module 1 always takes a picture with the maximum resolution and conversion accuracy and stores the image in the memory 18. Thus, the resolution and/or conversion accuracy is reduced at the stage of transferring information to the serial bus 10.

**[0044]** In viewfinder mode, the quantity of image information per image to be transferred is smaller than in normal photographic mode; consequently, images can be updated at a faster rate than when using solutions of prior art. Thus, the image is updated faster, and jerky movement cannot be noticed to a significant degree. Nevertheless, the final photograph can be taken with a higher resolution, whereby the control block of the mobile station transmits the required control commands and parameters to the control block 11 of the camera module 1. Taking a picture in this way can be implement-

ed for example so that the user presses a predetermined button in the keypad 29 of the mobile station. Thus, the camera module 1 conducts conversion of the image at a higher resolution, and after completion of the conversion, the camera module 1 transmits the serial bus 10 information about the completion of the image, whereby the control block 25 of the mobile station can start the transfer of the image information. In this case, the transfer of the image information takes a longer time than in the viewfinder mode, but, on the other hand, it is not significant.

**[0045]** The camera module 1 of the invention has the further advantage that image information can be transferred asynchronously in relation to the functions of the camera. Thus, the camera module 1 of the invention can be controlled in a way that it generates an image of the desired type, whereby it is possible, if necessary, to reduce the quantity of image information to be transferred. In camera modules of prior art, the image format and resolution can be changed, but the transfer of image information takes place at a constant rate determined by the camera module, whereby typically either a parallel bus or a fast serial bus is needed for transferring the information at a sufficient rate from the camera module to further processing stages.

**[0046]** Moreover, the camera module 1 of the invention can also be utilised in video recording, whereby each single image consists of a smaller quantity of image information than in camera modules of prior art, but the updating rate of the images can be raised, whereby a more realistic moving image is obtained. Also, pictures taken with the camera module 1 of the invention can be transmitted via a mobile communication network, if necessary. Thus, with reference to the block diagram of Fig. 2a/2b, the control block 25 of the mobile station reads the images in ways presented above and transfers the image information further to a radio element 30, from which the image information can be transmitted via a mobile communication network (not shown) to another mobile station or telecommunication terminal. Thus, the image information can be presented in the receiving telecommunication terminal. If necessary, the control block 25 of the mobile station compresses the image to be transferred to the radio element, whereby the data transmission can be enhanced in the mobile communication network. Because the processing of the image takes place primarily already in the camera module 1, the control block 25 of the mobile station does not need to have such a large processing capacity as when camera modules of prior art are used.

**[0047]** The present invention includes any novel feature or combination of features disclosed herein either explicitly or any generalisation thereof irrespective of whether or not it relates to the claimed invention or mitigates any or all of the problems addressed.

**[0048]** In view of the foregoing description it will be evident to a person skilled in the art that various modifications may be made within the scope of the invention.

## Claims

1. A method for transferring image information from a camera module (1) to an electronic device, such as a mobile station (23), in which camera module (1) an image is formed by an image sensor (2) comprising pixels where the light to which the pixels (P1,1—Pm,n) are exposed is converted into an analog signal which is converted into digital image information, characterised in that the image information is transferred in serial form and that the transfer of the image information is controlled from the electronic device (23).
2. The method according to claim 1, wherein the quantity of the image information to be transferred from the camera module (1) can be adjusted.
3. The method according to claim 2, wherein the adjustment of the quantity of image information to be transferred from the camera module (1) is conducted by adjusting the conversion accuracy of the analog/digital conversion.
4. The method according to claim 2 or 3, wherein the adjustment of the quantity of image information to be transferred from the camera module (1) is conducted by adjusting the resolution of the image.
5. The method according to claim 4, wherein the adjustment of the resolution of the image is conducted by undersampling of the image information.
6. The method according to claim 4 or 5, wherein in the electronic device (23), the resolution is restored by interpolation from the received image information.
7. A camera module (1) comprising an image sensor (2) with pixels (P1,1—Pm,n) for conducting photoelectric conversion, and means (6, 7) for conversion of the analog signal generated by said pixels into digital form, characterised in that the camera module (1) further comprises means (10) for transferring digital image information to an electronic device, such as a mobile station (23), in serial form, and means (11, 16) for conducting the transfer of the image information under control by the electronic device (23).
8. The camera module (1) according to claim 7, wherein the camera module (1) further comprises means (11) for adjusting the quantity of image information to be transferred from the camera module (1).
9. The camera module (1) according to claim 8, wherein said means (11) for adjusting the quantity of image information to be transferred from the camera module (1) comprise means (13) for adjusting the conversion accuracy of the analog/digital conversion.
10. The camera module (1) according to claim 8 or 9, wherein said means (11) for adjusting the quantity of image information to be transferred from the camera module (1) comprise means (15, 33) for adjusting the resolution of the image.
11. The camera module (1) according to claim 10, wherein said means (33) for adjusting the resolution of the image comprise means (12, 13) for undersampling of the image information.
12. The camera module (1) according to any of the claims 8 to 11, wherein said means (11) for adjusting the quantity of image information to be transferred from the camera module (1) comprise means (15) for undersampling of the image information formed in the camera module (1).
13. A mobile station (23), characterised in that the mobile station (23) comprises:
  - means (10) for connecting a camera module (1), the camera module (1) comprising an image sensor (2) with pixels (P1,1—Pm,n) for conducting a photoelectric conversion, and means (6, 7) for converting the analog signal generated by the photoelectric conversion means to digital form, and
  - means (24, 25) for controlling the transfer of image information formed by the camera module (1), and
  - means (24) for transferring the image information formed by the camera module (1) to the mobile station (23) in serial form.
14. The mobile station (23) according to claim 13, wherein the mobile station (23) further comprises means (11) for adjusting the quantity of image information to be transferred from the camera module (1).

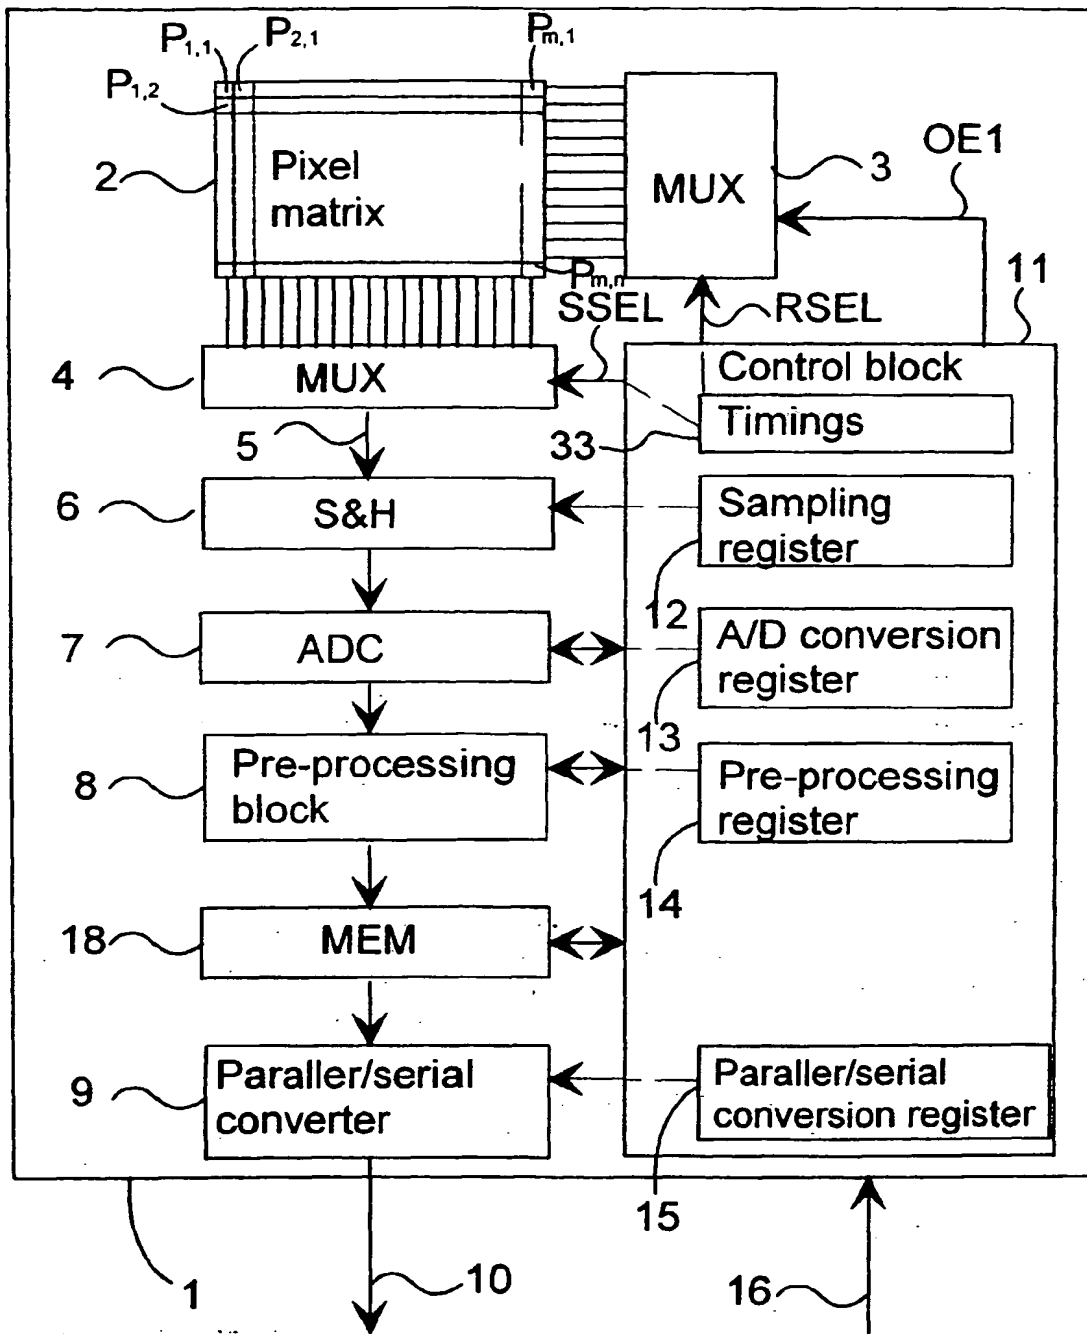


Fig. 1a

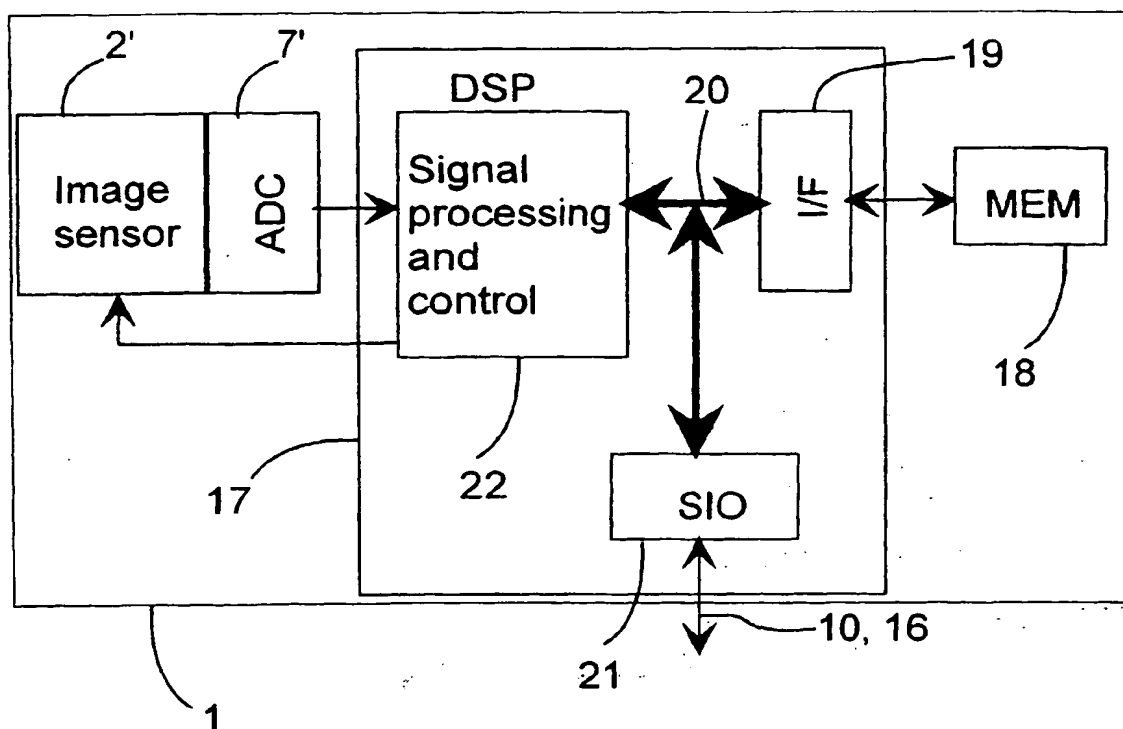


Fig. 1b

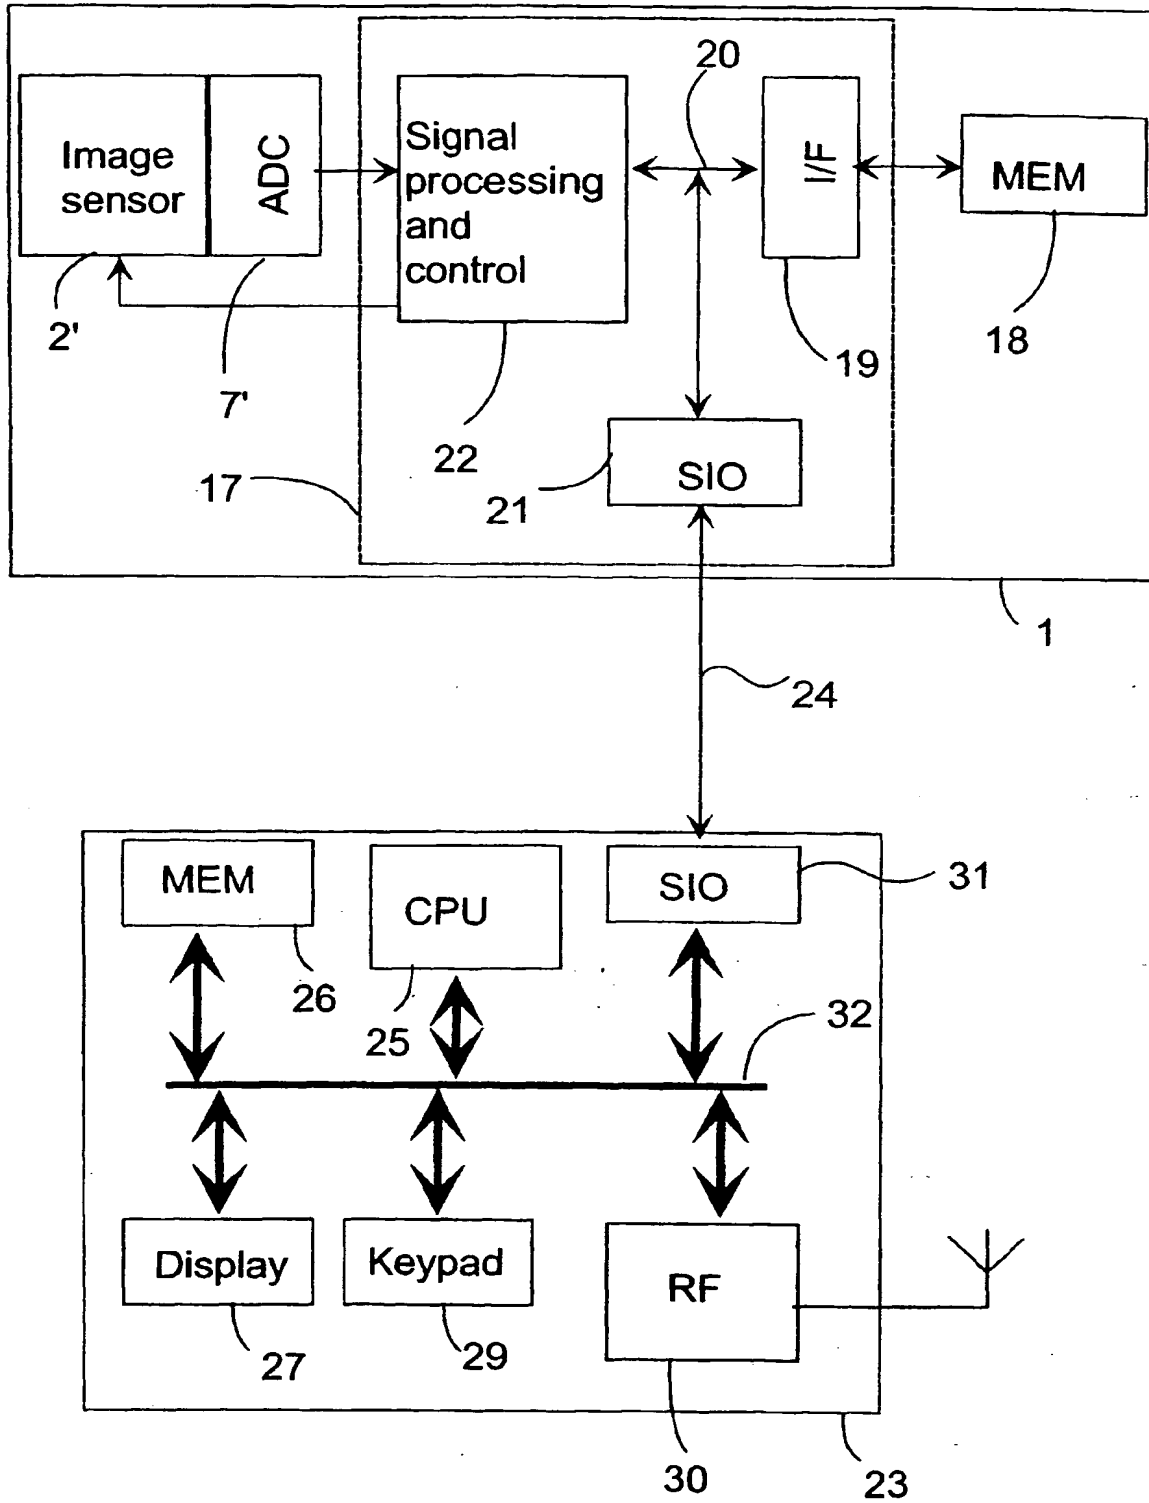


Fig. 2a


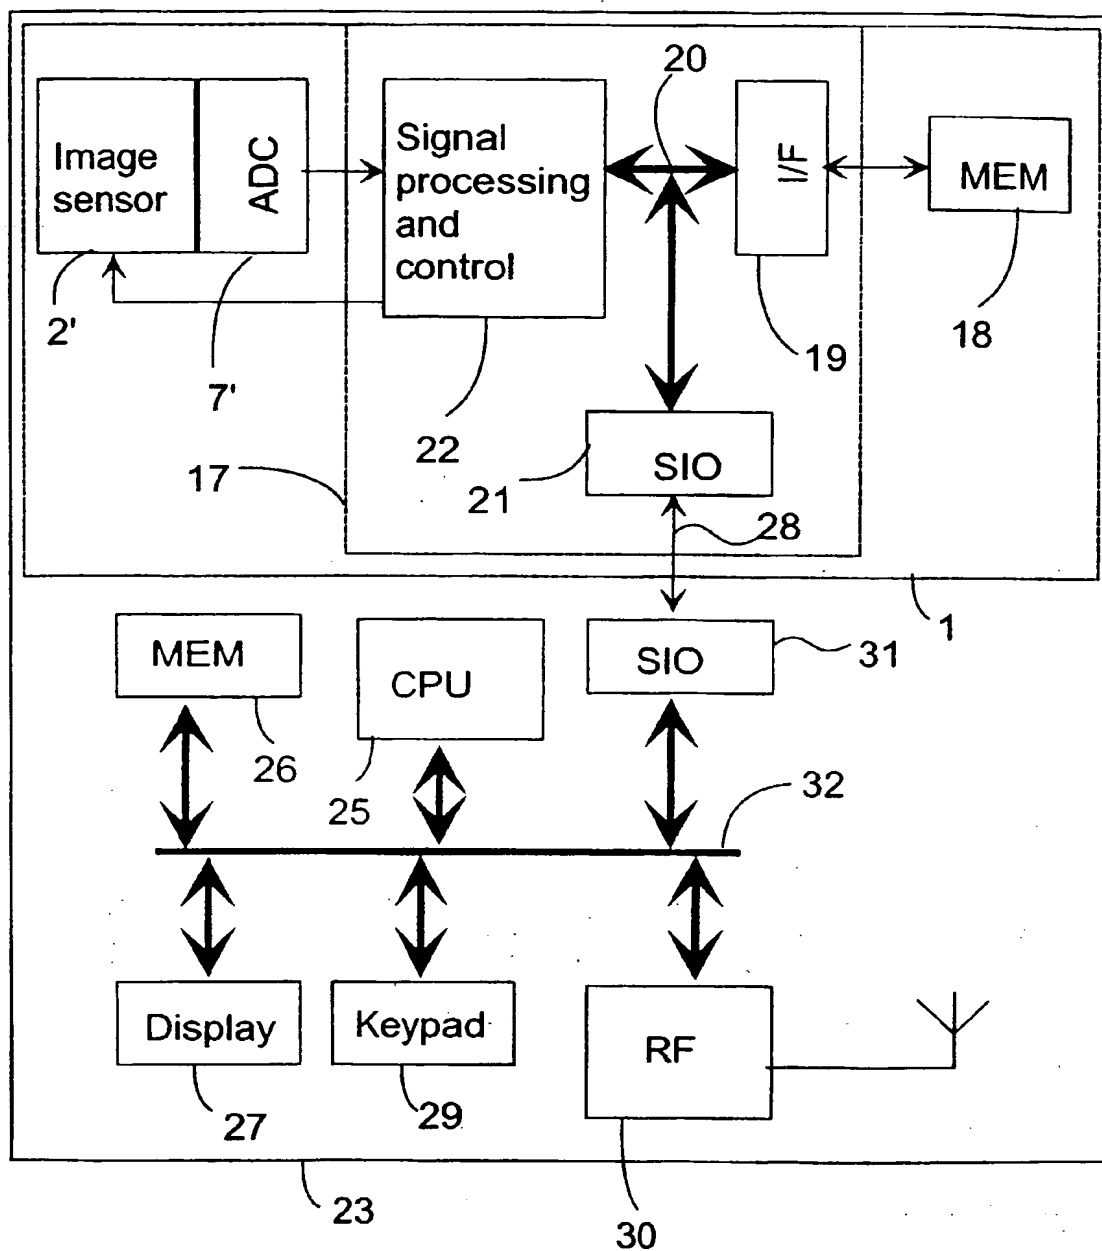


Fig. 2b

**THIS PAGE BLANK (USPTO)**



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) EP 0 932 304 A3

(12) EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
29.05.2002 Bulletin 2002/22

(51) Int Cl.<sup>7</sup>: H04N 5/232

(43) Date of publication A2:  
28.07.1999 Bulletin 1999/30

(21) Application number: 99300421.7

(22) Date of filing: 21.01.1999

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 23.01.1998 FI 980150

(71) Applicant: Nokia Corporation  
02150 Espoo (FI)

(72) Inventors:  
• Knuutila, Jarno  
33720 Tampere (FI)  
• Toivanen, Jari  
33720 Tampere (FI)

- Juhola, Janne  
33720 Tampere (FI)
- Lipponen, Markku  
33720 Tampere (FI)
- Aho, Ari  
33720 Tampere (FI)
- Haavisto, Janne  
33720 Tampere (FI)
- Saarinen, Kaj  
33720 Tampere (FI)

(74) Representative: Pursiainen, Timo Pekka et al  
Tampereen Patenttitoimisto Oy,  
Hermiankatu 6  
33720 Tampere (FI)

(54) Method for transferring image information

(57) The invention relates to a method for transferring image information from a camera module (1) to an electronic device, such as a mobile station (23). In the camera module (1), an image is formed by an image sensor (2) comprising pixels, where the light to which the pixel (P<sub>1,1</sub>—P<sub>m,n</sub>) is exposed is converted into an analog signal which is converted into digital image information. The image information is transferred in serial form, and the transfer of the image information is controlled by the electronic device (23).

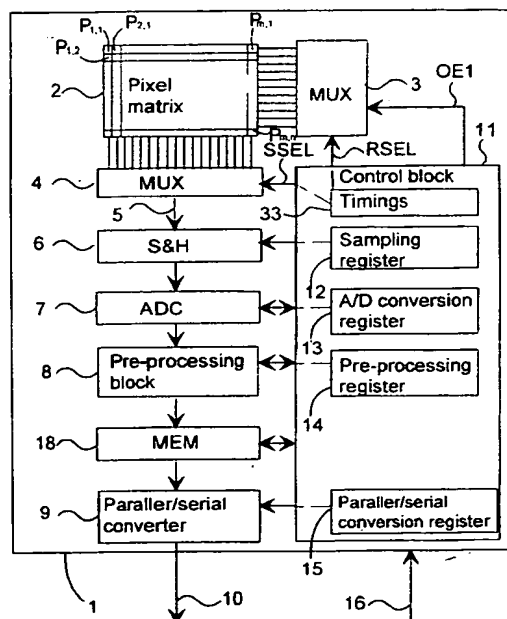


Fig. 1a



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 99 30 0421

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.6)
X	WO 97 40621 A (SILICON VISION INC) 30 October 1997 (1997-10-30) * page 3, line 25 - page 18, line 14 * * figures 2A,2B,4A *	1-14	H04N5/232
X	EP 0 659 017 A (EASTMAN KODAK CO) 21 June 1995 (1995-06-21) * column 4, line 1 - column 7, line 1 * * figures 1,4 *	1-14	
E	EP 0 878 961 A (CANON KK) 18 November 1998 (1998-11-18)  * column 6, line 41 - line 57 * * column 9, line 13 - column 11, line 28 * * figures 1,2 *	1-4, 6-10,13, 14	
			TECHNICAL FIELDS SEARCHED (Int.Cl.6)
			H04N
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>2 April 2002</b>	Examiner <b>Didierlaurent, P</b>
<p><b>CATEGORY OF CITED DOCUMENTS</b></p> <p>X : particularly relevant if taken alone  Y : particularly relevant if combined with another document of the same category  A : technological background  O : non-written disclosure  P : intermediate document</p> <p>T : theory or principle underlying the invention  E : earlier patent document, but published on, or after the filing date  D : document cited in the application  L : document cited for other reasons  &amp; : member of the same patent family, corresponding document</p>			

EPO FORM 1503 03.82 [P04C01]

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 99 30 0421

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-04-2002

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
WO 9740621	A	30-10-1997	AU	2448297 A	12-11-1997
			WO	9740621 A1	30-10-1997
EP 0659017	A	21-06-1995	EP	0659017 A2	21-06-1995
			JP	7240871 A	12-09-1995
EP 0878961	A	18-11-1998	JP	10304232 A	13-11-1998
			EP	0878961 A2	18-11-1998

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**THIS PAGE BLANK (USPTO)**